


MAXUS AM50

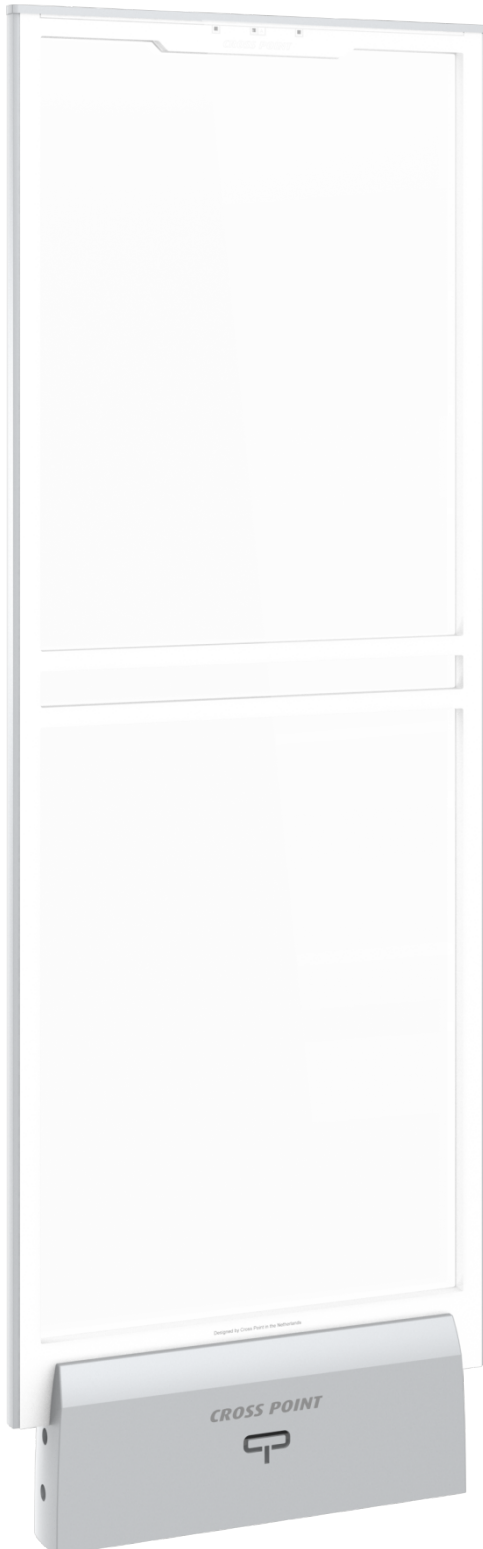

The MAXUS AM50 is an acrylic light weight, yet robust antenna perfectly matching your store interior and non-obtrusively fulfilling its task.

The MAXUS AM50 combines AM based 58 kHz article surveillance with integrated visitor counting. It is designed with maximum transparency, minimizing entrance obstruction and offers maximum detection of hard tags and disposable tags in challenging store environments.

Bidirectional sensors, integrated in the MAXUS AM50 antennas, count the number of visitors entering and leaving the store. This enables you to easily verify and adjust staff planning and optimize store performance.

In case of an alarm event, MAXUS AM50 notifies staff about the nature of that event by making use of the multicolor lights, so correct measures can be taken. The illuminated logo can function as a system active indicator.

When connected to our CrossCONNECT platform, visitor numbers and alarm management information will be online available for further processing. Reports can be sent to your mailbox and information can flexibly be integrated in existing management information systems.

Remote maintenance guarantees optimum operation at minimum costs.

Unique features

Premium detection combined with maximum transparency

Selectable notifications for different alarm types

Remote service enabled, management information available

Integrated visitor counters



MAXUS AM Antenna Line

Features	MONO TRX	DUAL TRX + RX	DUAL TRX + TRX
	MAXUS AM50 Optima	MAXUS AM50 Optima	MAXUS AM50 Optima
Transparent acrylic design	●	●	●
Premium detection	●	●	●
Integrated bi-directional visitor counter ^{1,2}	-	●	●
Distinction between in- and outgoing alarms	-	●	●
Integrated metal detection	-	-	-
Integrated jammer detection	●	●	●
Integrated door bell	-	●	●
Selectable notifications for all alarm types ⁴	●	●	●
Low cost of ownership	●	●	●
Alarm lights (multi-color)	●	●	●
Remote service and management information ¹	●	●	●
Smart Sensitivity Control	●	●	●
Aisle light-up during alarm (both antennas) Auto	-	●	●
arrange antennas with software	-	●	●
Metal covers	○	○	○

Detection distance

SuperPencil ³	up to 1.30 m	up to 2.60 m	up to 2.60 m
DR label ³	up to 1.10 m	up to 2.10 m	up to 2.10 m

Specifications

Antenna width (mm)	506	506	506
Antenna height (mm)	1.509	1.509	1.509
Antenna depth (base / profile mm)	70 / 26	70 / 26	70 / 26
Mains (VAC)	110/220	110/220	110/220
Board power (VDC)	30	30	30
Power over field bus (receivers only)	-	●	-
Programmable I/Os / Relays	2 / 1	2 / 1	2 / 1

● standard available

○ optional

- not available

1 In combination with the CrossCONNECT Access Point

2 Visitor counting is also possible with 2 or more mono antennas

3 Tested in all label orientations, depending on environment. For mono the specified distance is on each side of the antenna

4 For single mono antenna, visitor counter related notifications cannot be selected