



Maxus AM50 Optima Dual (Transceiver and Receiver) System Requirements

VITAG

Tel 1300 551 662
 Fax 1300 551 649
 Email info@vitag.com.au
 Website www.vitag.com.au

— Power Cable, Supplied
 — Slave Cable, Supplied

— Cat 5/6 Cable, Supplied by Technician

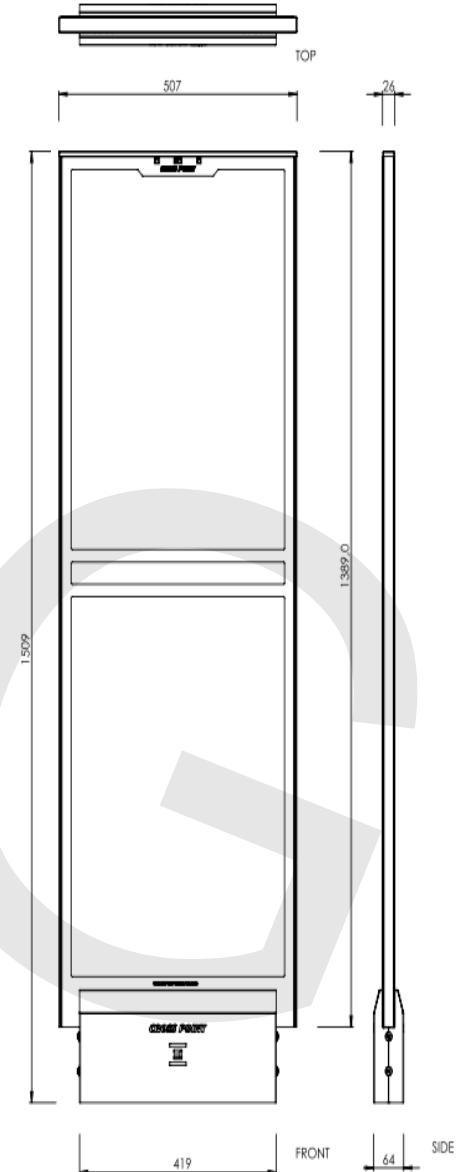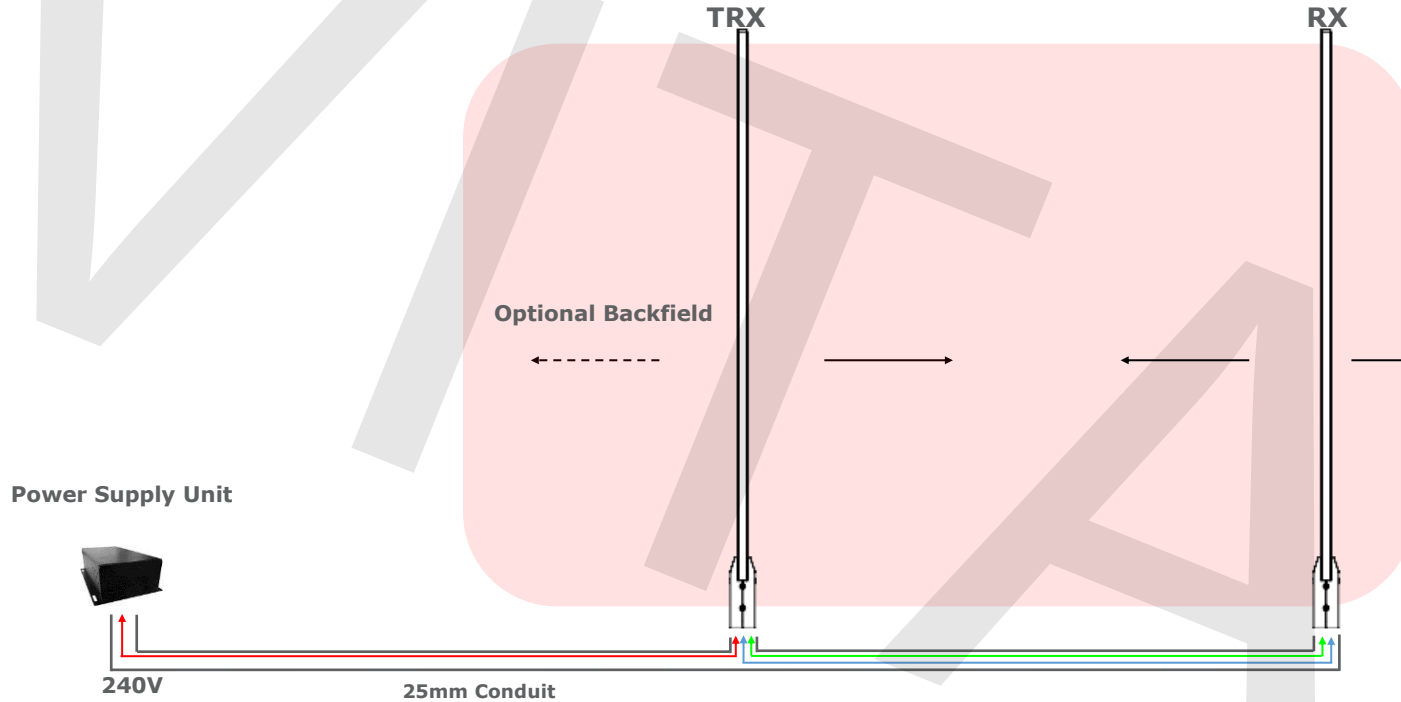

Maxus AM50 Optima Transceiver-PSU:

CP2101-6821-5300

Maxus AM50 Optima Receiver:

CP2101-6824-5300

Power Supply:

210mm x 172mm x 70mm

Pedestal spacing is dependent on Tags/Labels to be used - refer to consultant

Builder - Provide single 25mm Conduit in floor chase from Power Supply to last Pedestal with T pieces and sweeps at centre of each Pedestal.