


iD Top - RFID Double Transceiver System Requirements



Tel 1300 551 662
 Fax 1300 551 649
 Email info@vitag.com.au
 Website www.vitag.com.au

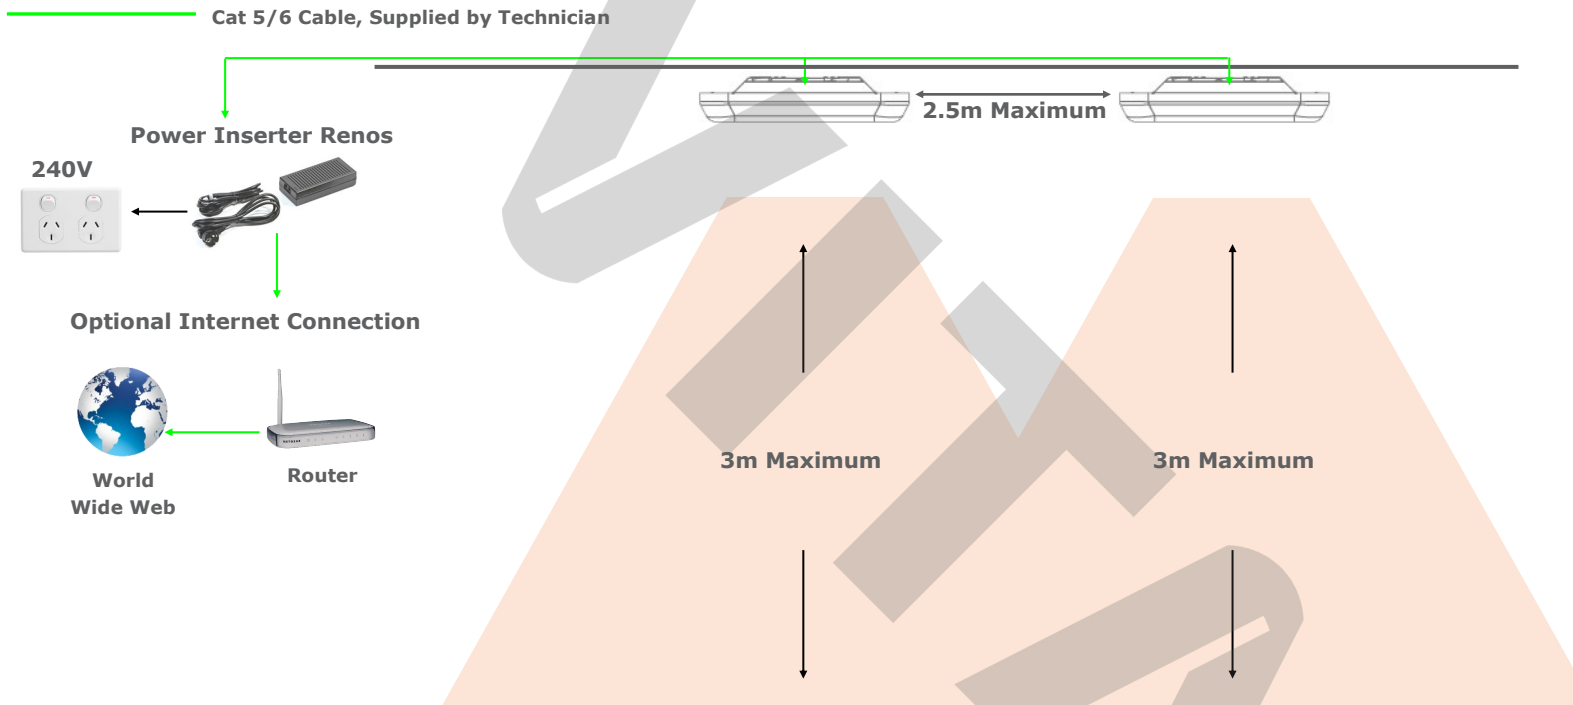

Up to 5 iD Tops may be added in same configuration using one Power Inserter

iD Top-Region 3

ND9982213

Dimensions

380mm x 380mm x 80mm

Power Inserter Renos (PoE)

ND9563067

Mounting Options

Steel cables or Flush mount

iD Top Cable Mounting Kit

ND9983007

Power Source

Power over Ethernet

PoE Power Supply:

188mm x 84mm x 45mm

Detection zone is dependent on RFID Tags/Labels to be used - refer to consultant

Builder: A dedicated 240v GPO is required .