



Fortus AM40 Luna and Optima Dual (TXR and RX) with Remote Connection System Requirements



Tel 1300 551 662
 Fax 1300 551 649
 Email info@vitag.com.au
 Website www.vitag.com.au

- Power Cable, Supplied
- Slave Cable, Supplied
- - - Optima People Counter Signal

— Cat 5/6 Cable, Supplied by Technician

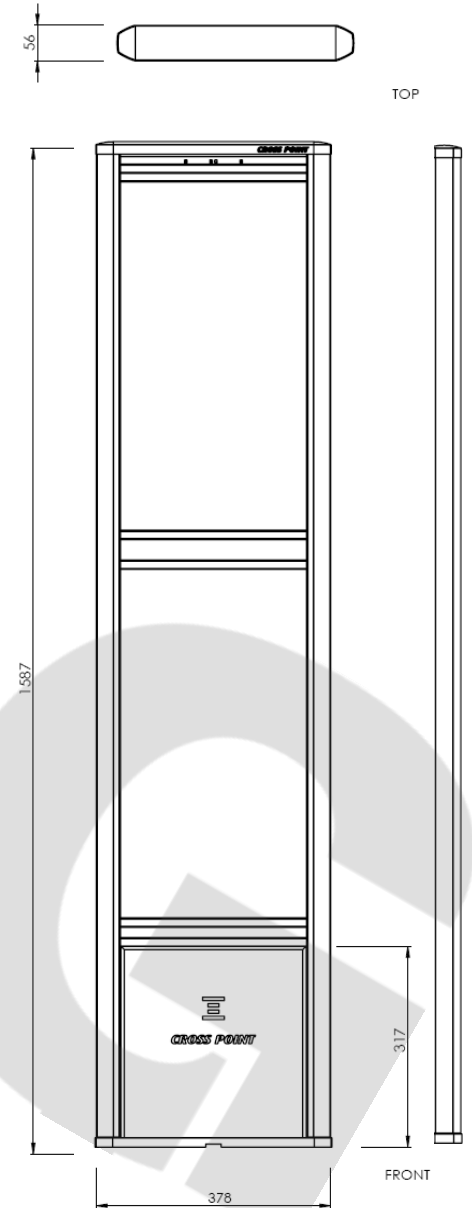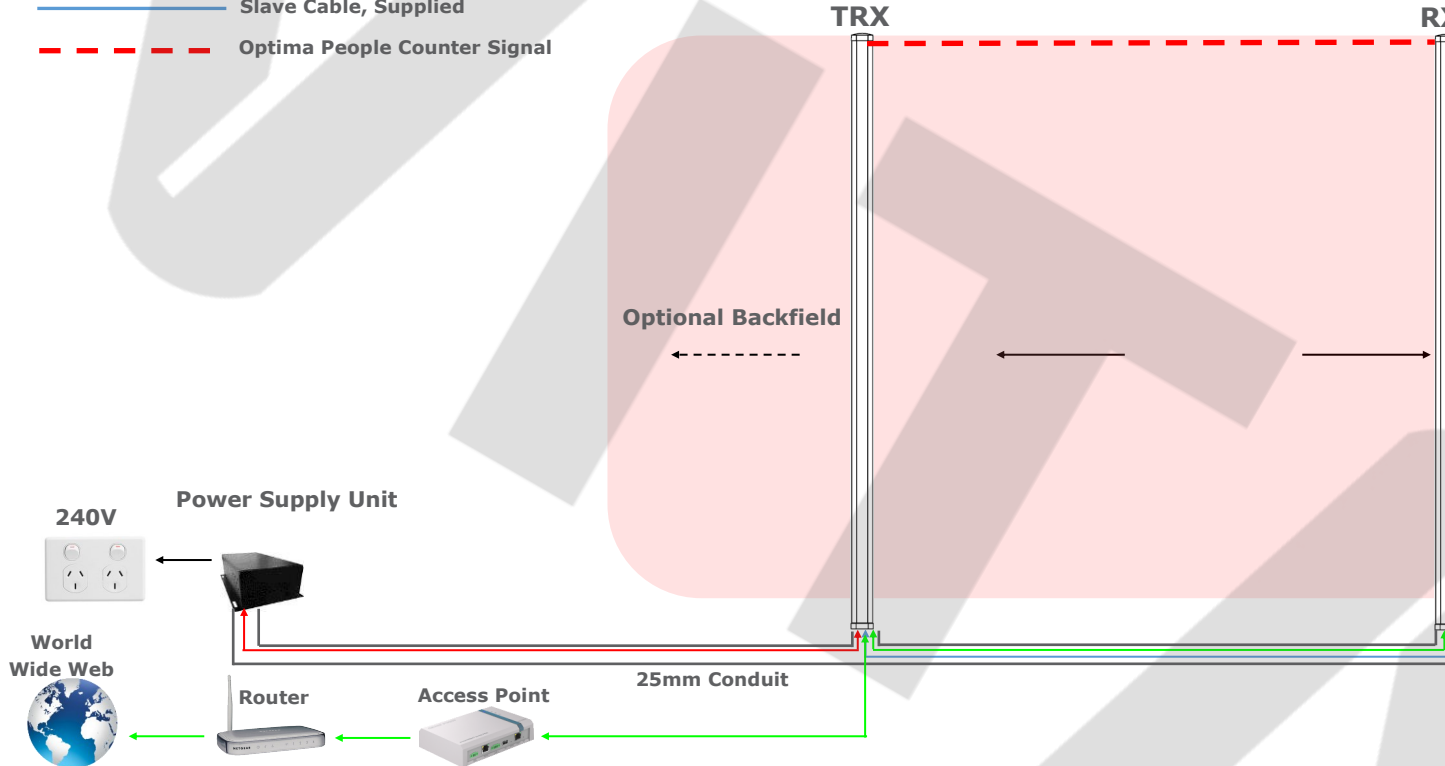

- Fortus AM40 Luna Transceiver-PSU: CP2101-6723-5200
- Fortus AM40 Luna Receiver: CP2101-6724-5200
- Fortus AM40 Optima Transceiver-PSU: CP2101-6723-5300
- Fortus AM40 Optima Receiver: CP2101-6724-5300
- Power Supply: 210mm x 172mm x 70mm

Detection zone is dependent on Tags/Labels to be used - refer to consultant

Builder - Provide single 25mm Conduit in floor chase from Power Supply to Pedestal with sweep at centre of the Pedestal.

Cable Spec: Power Cable= 3 CORE 7/0.30 SHIELDED CONTROL CABLE or equivalent, Slave Cable= Belden-M 8723 Multi-Conductor - Shielded Twisted Pair Cable or equivalent