



Nexus AM30 Optima Quad (2 x Transceiver and 2 x Receiver) with Remote Connection System Requirements

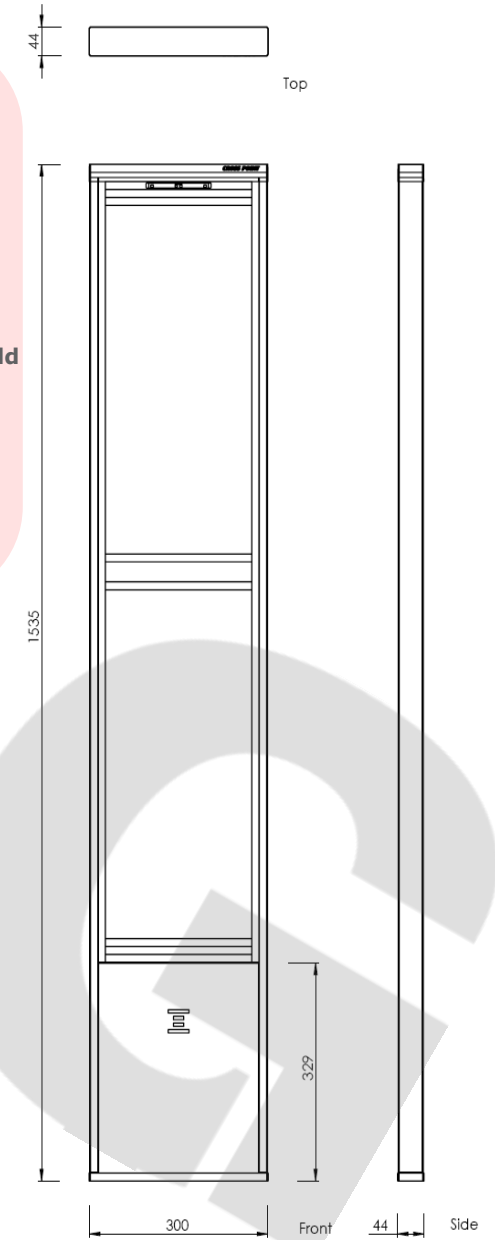

Tel 1300 551 662
 Fax 1300 551 649
 Email info@vitag.com.au
 Website www.vitag.com.au

— Power Cable, Supplied — Cat 5/6 Cable, Supplied by Technician
— Slave Cable, Supplied — People Counter Signal

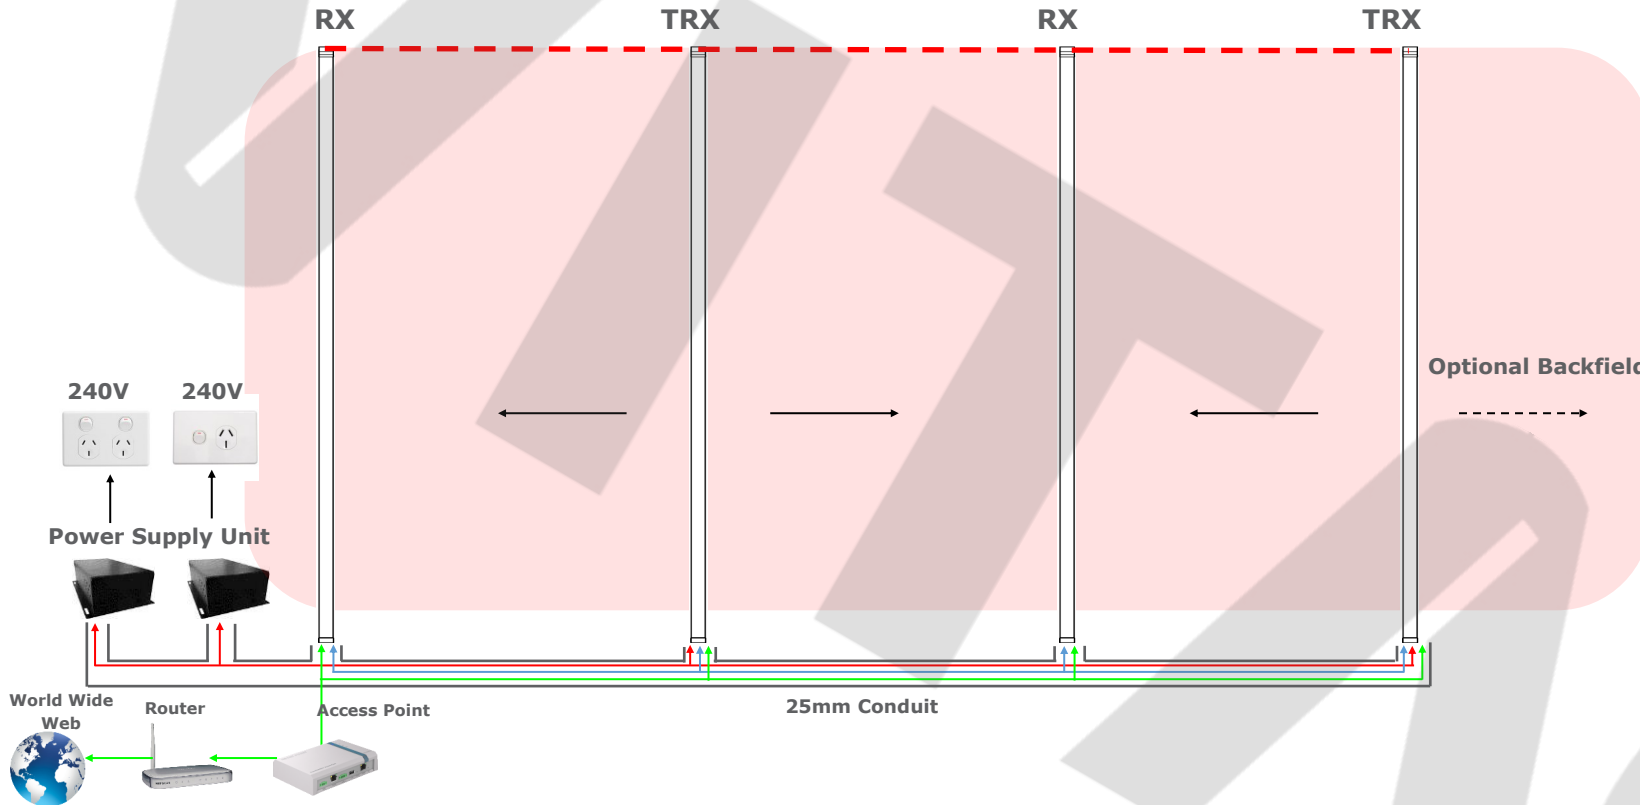

- Nexus AM30 Optima Transceiver-PSU: CP2101-7023-5300
- Nexus AM30 Optima Receiver: CP2101-7024-5300
- Cross Connect Access Point (Remote Access): CP2117-0403-0000
- Power Supply: 210mm x 172mm x 70mm

Pedestal spacing is dependent on Tags/Labels to be used - refer to consultant

Builder - Provide single 25mm Conduit in floor chase from Power Supply to last Pedestal with T pieces and sweeps at centre of each Pedestal.

Cable Spec: Power Cable = 3 CORE 7/0.30 SHIELDED CONTROL CABLE or equivalent, Slave Cable = Belden-M 8723 Multi-Conductor - Shielded Twisted Pair Cable or equivalent