



Nexus AM30 Optima Triple (Transceiver and 2 x Receiver) with Remote Connection System Requirements



Tel 1300 551 662
 Fax 1300 551 649
 Email info@vitag.com.au
 Website www.vitag.com.au

— Power Cable, Supplied
 — Slave Cable, Supplied

— Cat 5/6 Cable, Supplied by Technician
 - - - People Counter Signal

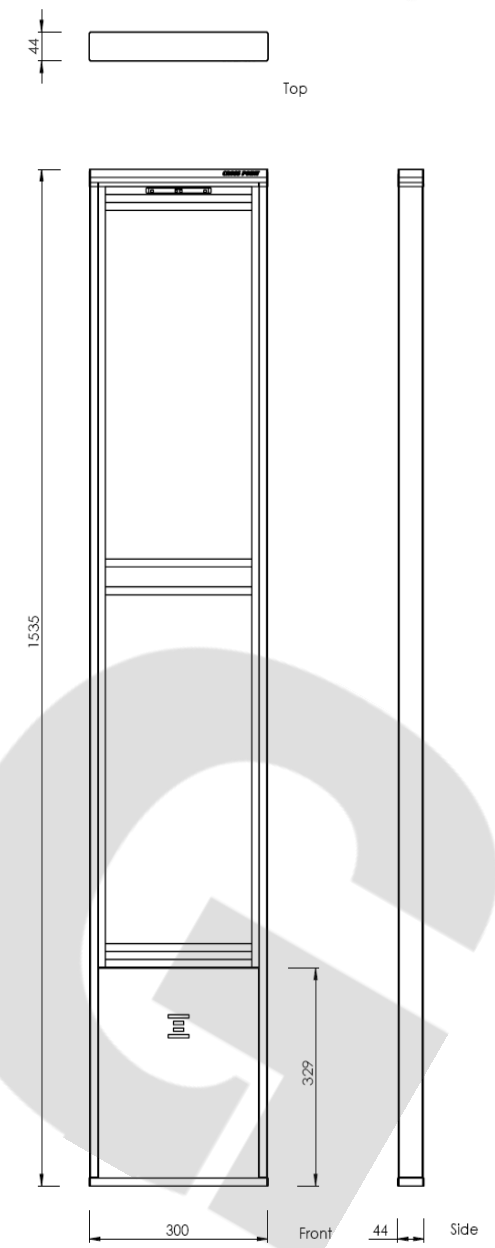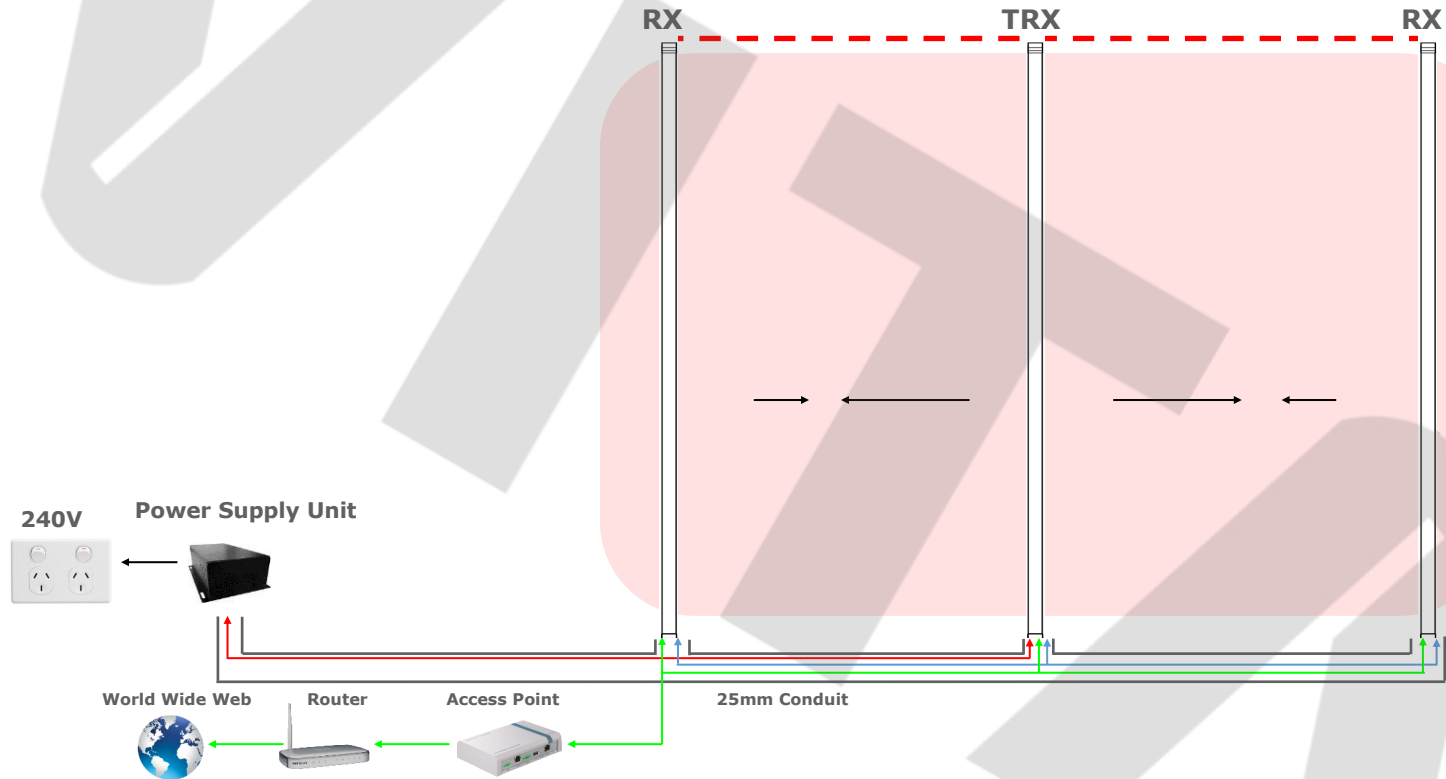

Nexus AM30 Optima Transceiver-PSU:

CP2101-7023-5300

Nexus AM30 Optima Receiver:

CP2101-7024-5300

Cross Connect Access Point (Remote Access)

CP2117-0403-0000

Power Supply:

210mm x 172mm x 70mm

Pedestal spacing is dependent on Tags/Labels to be used - refer to consultant

Builder - Provide single 25mm Conduit in floor chase from Power Supply to last Pedestal with T pieces and sweeps at centre of each Pedestal.

Cable Spec: Power Cable = 3 CORE 7/0.30 SHIELDED CONTROL CABLE or equivalent, Slave Cable = Belden-M 8723 Multi-Conductor - Shielded Twisted Pair Cable or equivalent